



CR3-2

24 Vac Full height turnstile - Double passage



**MADE
IN ITALY**



9343911 **CR3-2-3 000**

9343912 **CR3-2-3 00N**
9343913 **CR3-2-3 0NN**

9343242 **CR3-2-3 NNN**
9343240 **CR3-2-3 MMN**



OUTDOOR
AND INDOOR
INSTALLATION



HIGH
PEDESTRIAN
TRAFFIC
INTENSITY



PASSAGES
PER HOUR

24 Vac double passage full height turnstile, bidirectional, with LED light that indicate the status. Available in different versions.
Three sections rotor. Available power supply PS.130.



9343916 **CR3-2-4 000**

9343917 **CR3-2-4 00N**
9343251 **CR3-2-4 0NN**

9343252 **CR3-2-4 NNN**
9343250 **CR3-2-4 MMN**



OUTDOOR
AND INDOOR
INSTALLATION




HIGH
PEDESTRIAN
TRAFFIC
INTENSITY



PASSAGES
PER HOUR

24 Vac double passage full height turnstile, bidirectional, with LED light that indicate the status. Available in different versions.
Four sections rotor. Available power supply PS.130.



9343216 **PS130**

230/24 Vac transformer.
Double passage full height turnstiles
need two transformers.

FEATURES

MODEL	GALVANIZED STEEL	STAINLESS STEEL	POWDER COATING STEEL	SINGLE PASSAGE	DOUBLE PASSAGE	3 SECTIONS ROTOR	4 SECTIONS ROTOR
CR3-2-3 000	A + B + C				✓	✓	
CR3-2-3 00N	A + C	B			✓	✓	
CR3-2-3 0NN	C	A + B			✓	✓	
CR3-2-3 NNN		A + B + C			✓	✓	
CR3-2-3 MMN		B	A + C		✓	✓	
CR3-2-4 000	A + B + C				✓		✓
CR3-2-4 00N	A + C	B			✓		✓
CR3-2-4 0NN	C	A + B			✓		✓
CR3-2-4 NNN		A + B + C			✓		✓
CR3-2-4 MMN		B	A + C		✓		✓

A ROOF

B ROTOR

C FRAME



CR3-2

24 Vac Full height turnstile - Double passage



MADE
IN ITALY

CR	3-2-3	3-2-4
POWER SUPPLY	{2x} 24 Vac	
ABSORBED POWER	{2x} 130 W	
ABSORBED CURRENT	{2x} 5,4 A	
OPERATING TEMPERATURE	-25° / +50° C	
PROTECTION LEVEL	IP 44	
WEIGHT	390 kg	420 kg

LEGEND

CR3 - ■ - ■ A C B

O: galvanized steel
N: stainless steel
M: powder coating steel

3: 3 sections rotor
4: 4 sections rotor

1: single passage
2: double passage

SECTIONS



3 sections



4 sections


TECHNICAL DRAWING

A ROOF

B ROTOR

C FRAME

CR3-2-3

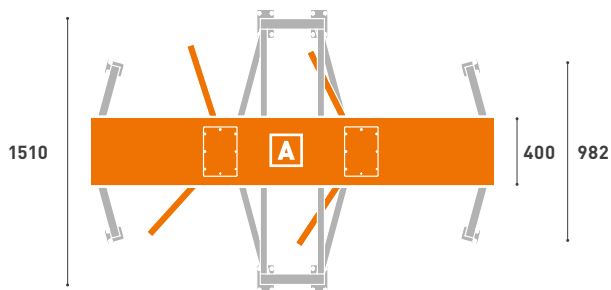

CR3-2-4

